


ITEM	QTY -043	P/N	DESCRIPTION
	X	D5357-043	STRUT WELDMENT
1	2	D4794-3	STUD
2	1	D5357-1	STRUT
3	2	AN665-34R	THREADED CLEVIS TIE ROD
4	2	NAS509-4C	NUT, JAM

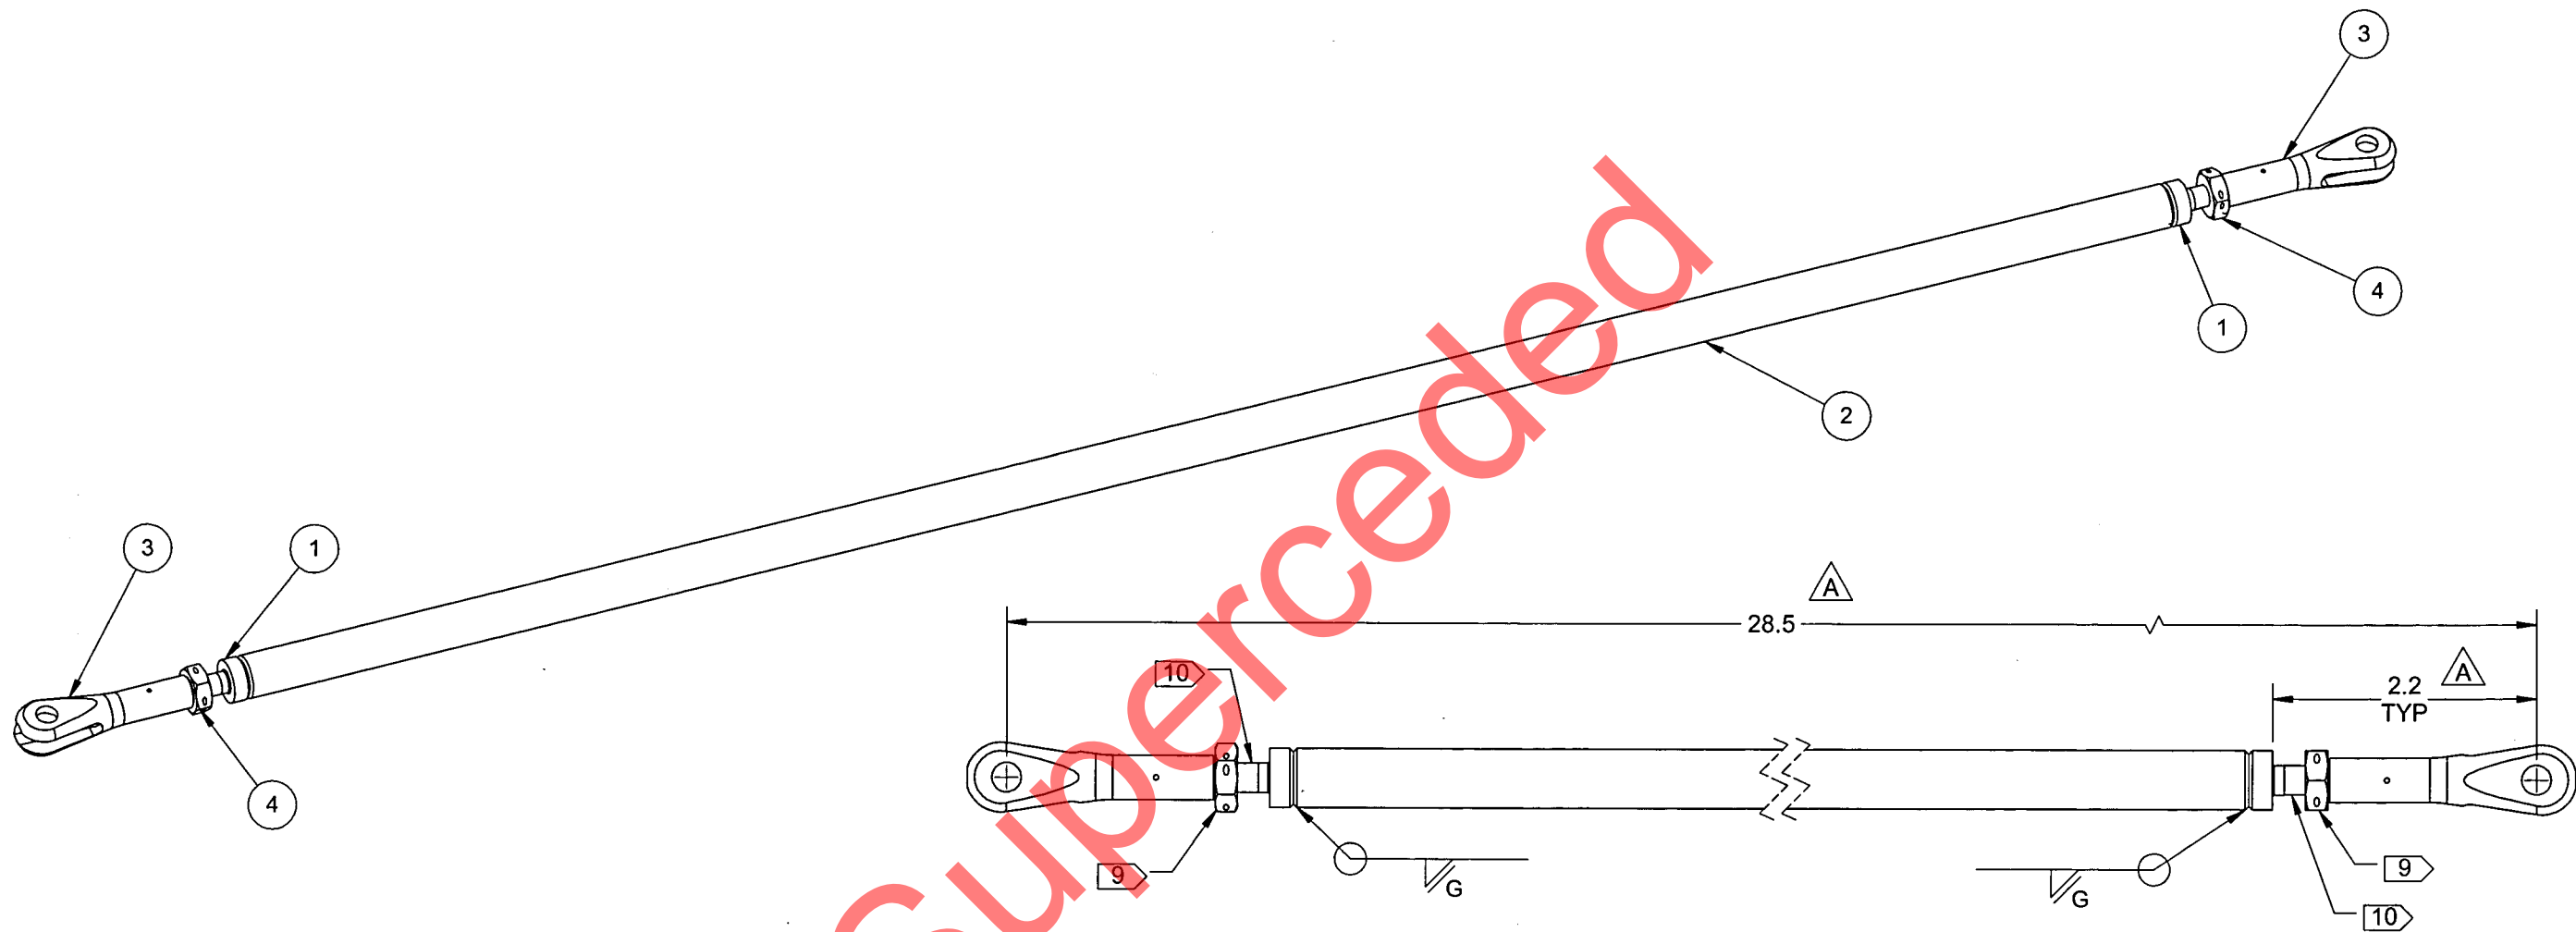


**D5357-043 STRUT WELDMENT**

- NOTES:
- 1) MATERIAL: N/A
  - 2) FINISH: N/A
  - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
  - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
  - 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
  - 6) IDENTIFICATION: N/A
  - 7) WEIGHT: 0.69 lbs
  - 8) WELD PER DART QSI 004
  - 9) HAND TIGHTEN NAS509-4C NUT
  - 10) USE TECTYL 502C CLASS I, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD

RELEASED  
2017-01-11

APPROVED

DESIGN	RF	<b>DART AEROSPACE LTD</b> HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	VS	DRAWING NO.	REV. B
MFG. APPR.	DD	D5357	SHEET 2 OF 3
APPROVED	HS	TITLE	SCALE
DE APPR.	DS	STRUT ASSEMBLY	NTS
DATE	16.12.15	COPYRIGHT © 2015 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

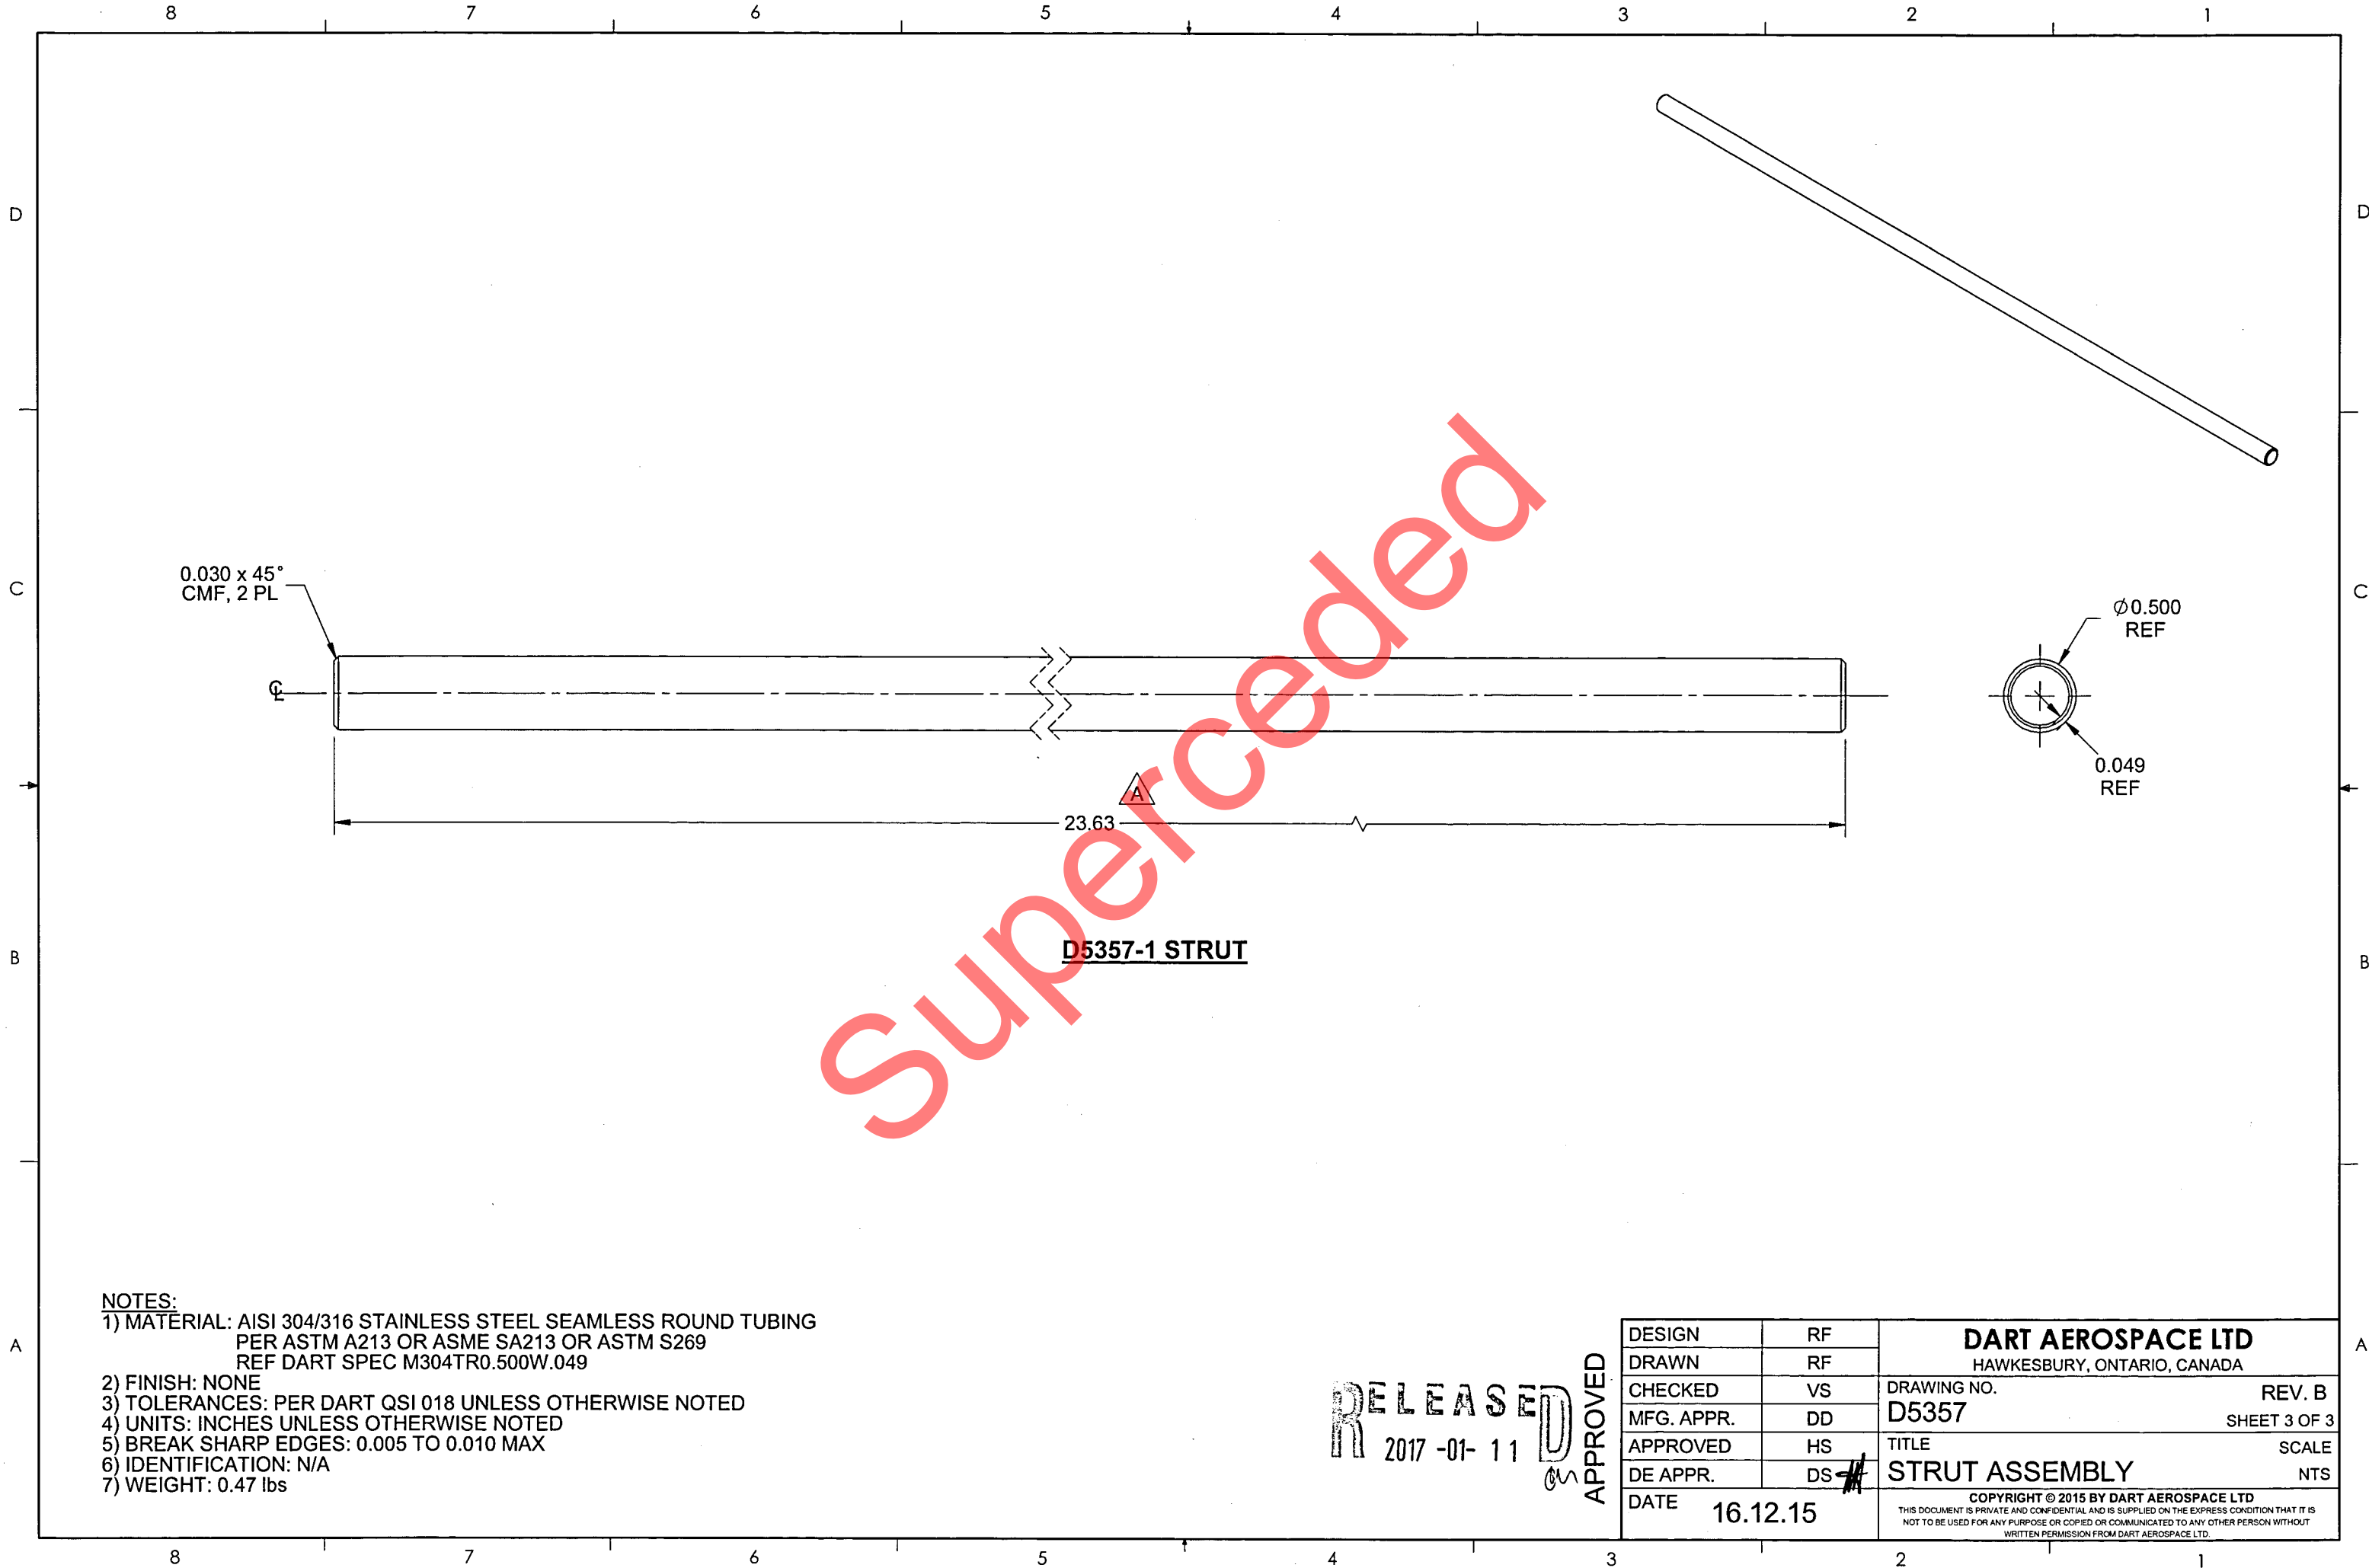

NOTES:

- 1) MATERIAL: AISI 304/316 STAINLESS STEEL SEAMLESS ROUND TUBING  
PER ASTM A213 OR ASME SA213 OR ASTM S269  
REF DART SPEC M304TR0.500W.049
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: N/A
- 7) WEIGHT: 0.47 lbs

RELEASED  
2017-01-11

APPROVED

DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	VS	DRAWING NO. D5357	REV. B
MFG. APPR.	DD	SHEET 3 OF 3	
APPROVED	HS	TITLE	SCALE
DE APPR.	DS	STRUT ASSEMBLY	NTS
DATE	16.12.15	COPYRIGHT © 2015 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	